


## Key Features

1. Dual Intel® 64-bit Xeon® Quad-Core or Dual-Core, with 667 / 1066 / 1333 MHz FSB
2. Up to 32GB DDR2 667 & 533 SDRAM Fully Buffered DIMM (FB-DIMM)
3. Left Universal Slot (Full-height, Full-length): 1 64-bit 100MHz PCI-X OR 1 (x8) PCI-Express
4. Right Universal Slot (Low-Profile): 1 64-bit 100MHz PCI-X OR 1 (x8) PCI-Express
5. Intel® (ESB2/Gilgal) 82563EB Dual-port Gigabit Ethernet
6. 4 x 3.5" Hot-swap U320 SCSI Drive Bays
7. 560W High-efficiency Power Supply

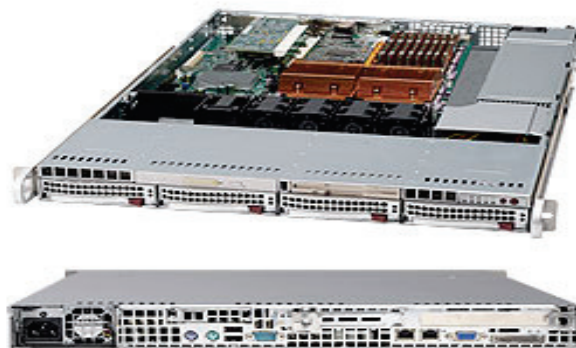

## Processor / Cache

Processor	Dual Intel® 64-bit Xeon® Quad-Core or Dual-Core
System Bus / QPI	Supports 667 / 1066 / 1333MHz FSB

## Key Application

HPC Cluster Computer Nodes, Data Centers, Data Farm

## Chipset / Serverboard

Intel® 5000P (Blackford) chipset

## System Memory

Memory Capacity	Supports up to 32 GB 667 / 533MHz DDR2 ECC FB-DIMM memory
-----------------	---

## Expansion Slot

Left Universal Slot: 1 64-bit 100MHz PCI-X OR 1 (x8) PCI-e Slot  
 Right Universal Slot: 1 64-bit 100MHz PCI-X OR 1 (x8) PCI-e Slot

## Integrated On-Board

SAS / SATA	SCSI: Adaptec AIC-7902 Controller, Support RAID 0, 1, 10
LAN	Intel® (ESB2/Gilgal) 82563EB Dual-Port Gigabit Ethernet Controller
Graphics	ATI ES1000 controller with 16 MB of video memory

## RAID Card

Support AOC-LPZCR1 / AOC-LPZCR2

## Add-on Card

-

## Drive Bays

HDD Drive	Supports 4x 3.5" Hot-swap U320 SCSI drive bays
Peripheral Drive	DVD-ROM: Slim 8x DVD-ROM drive

## Power Supply

560W AC power supply w/ PFC (20-pin)

## Cooling System

Fans: 4x Cooling Fans ; Shroud: 1x Air Shroud

## Form Factor

### 1U Rackmount

W x H x D	17.2" (437mm) x 1.7" (43mm) x 25.6" (650mm)
-----------	---

### India Authorized Distributor:

Mega Networks Pvt. Ltd. India	+9122 4155 8282	e-Mail: info@meganet1.com
	+9122 2562 8282	sales@meganet1.com
Meganet Technologies, Inc. USA	+1 302 261 5400	Web: www.meganet1.com

### Corp. Office :

#507-508 Corporate Centre, Nirmal Lifestyle, L.B.S. Marg, Mulund (W), Mumbai - 400 080. India

Mumbai | Pune | Hyderabad | Ahmedabad | San Francisco

